

Wiring E27 Pullcord Lampholder

For further information visit:
support.lampspares.co.uk
Search for IS-ESPC in the search box.

Ref:
IS-ESPC

Kit Contains:

1x E27 Lampholder Cap
1x E27 Lampholder Insert and Cord
1x E27 Lampholder Skirt



Before you start please ensure you are competent to carry out electrical works and ensure the electricity is turned off.

If in any doubt stop what you're doing and seek professional advice.

Step 1: Mount the lampholder cap to the 10mm male thread of the lamp fitting.


Step 2: Feed the Cable (2 core) up the lamp into the cap.

Step 3: Wire the Brown (Live) to the terminal on the lampholder insert and the Blue (Neutral) into the terminal on the round part as shown on the right.

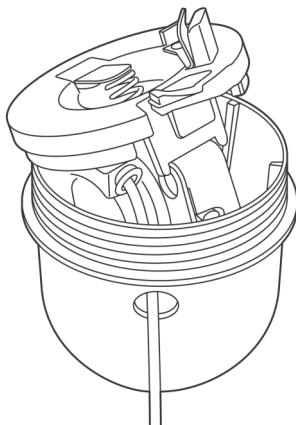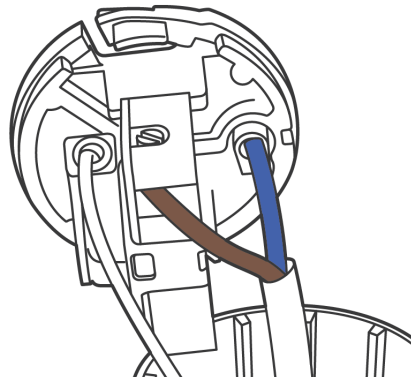

Step 4: Sit the insert carefully into the cap so the cord can travel in and out the hole freely. Please see picture to the left.

Step 5: Hold the insert down in position and carefully pull the cord a few times to ensure the switch operates ok.


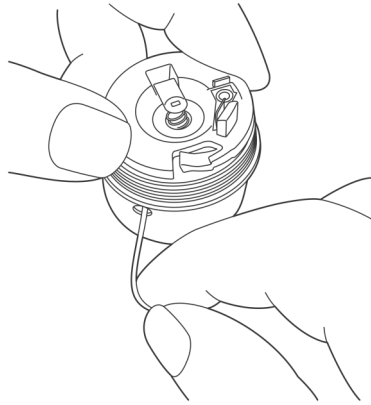


Step 6: Carefully screw the lampholder skirt onto the lampholder cap which will hold the insert in place. This will click as it's tightened up, which is the locking device. If you need to open the lampholder depress the barb whilst turning the skirt anti-clockwise.

Locking Device barb is shown below.

Press Down here to unlock.

This will need to be located inside the lampholder, so can be difficult to find.

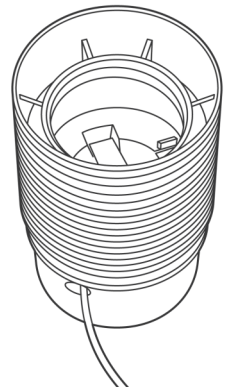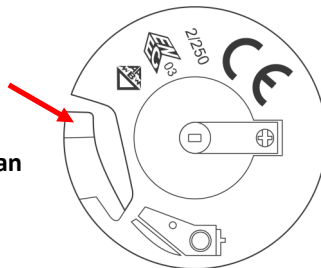

If you have any concerns or difficulties in connecting this product please contact us on details at the bottom of this guide.

All electrical parts confirm to the relevant BS numbers and have full CE approval, please email for copies.



Unit 3 Brookside Business Park | Brookside Avenue | Rustington | West Sussex | BN16 3LP

T: 01903 776644 | KB: support.lampspares.co.uk

© Lampspares. All Rights Reserved