

E27 Lampholder Cup

For further information visit:
support.lampspares.co.uk
Search for LSLHC in the search box.

Ref:
ISLHC

Kit Contains:

1x Lampholder Cup	1x Lamp Holder
1x All Threaded Rod	1x Steel Nut
1x Shake Proof Washer	1x Cord Grip

Before you start please ensure you are competent to carry out electrical works and ensure the electricity is turned off.

If in any doubt stop what you're doing and seek professional advice.

A full step by step guide is available from support.lampspares.co.uk and searching LSLHC in the search box.

Step 1: Screw the supplied all threaded rod into the Lampholder followed by the nut and shake proof washer.


Step 2: Slide the cord grip up the cable followed by the Lampholder cover.

Step 3: Then slide the Lampholder cap with the all threaded rod, nut and washer on up the cable.

Step 4: Wire the Lampholder and screw the skirt of the Lampholder onto the cap then slide the cover over the Lampholder so the threaded rod is sticking out the top.


Step 5: Finally slide the cord grip back down the cable and screw it onto the threaded rod, tighten up the small grub screw on the cord grip, This will now finish off the installation.

Wiring of the lamp holder

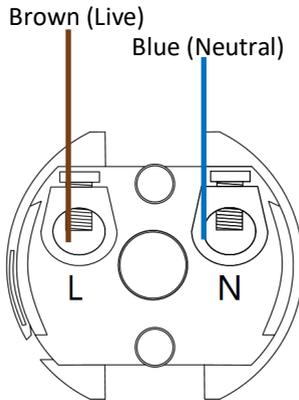

The Lamp Holder has a locking device that once screwed together it won't simply untwist.

To unlock the lamp holder to enable disassembly of the lamp holder you will need to push down the highlighted area in the below picture at the same time as unscrewing the skirt of the lamp holder.



If you have any concerns or difficulties in connecting this product please contact us on details at the bottom of this guide.

All electrical parts confirm to the relevant BS numbers and have full CE approval, please email for copies.



Unit 3 Brookside Business Park | Brookside Avenue | Rustington | West Sussex | BN16 3LP

T: 01903 776644 | KB: support.lampspares.co.uk

© Lampspares. All Rights Reserved